

A New Method of Measuring Total Polar Compounds in Frying Oil: RGB Color Code

Boran Duman

American Collegiate Institute, Göztepe İnönü St. No:476, Konak, İzmir, 35290, Turkey; boranduman2005@gmail.com

ABSTRACT: During the frying process, physical and chemical changes occur within frying oil and produce harmful components named Total Polar Compounds (TPC) which also threaten human health. TPC measuring methods are generally expensive, time-consuming, and require special equipment. In this study, we aimed to develop a simpler, more accessible, and affordable method to measure TPC in frying oils by taking Red-Green-Blue color codes (RGB) as a basis. Waste oil was diluted with bottled oil into 10 different concentrations. Samples' TPC values were measured with a Testo 270 device and corroborated with a spectrophotometric measuring method. Additionally, the samples' pictures were taken and RGB's of individual samples have been noted with the help of a computer and cell phone. It is indicated that there is a direct correlation between acidity and TPC. RGBs have a high correlation with TPC. TPC level which is measured by RGBs on images gathered from both the computer and cell phone are found compatible with TPC reference values. Best results are obtained from the Red/Green ratio. Through this quick, easy, inexpensive, repeatable method; the TPC content of frying oil can be measured easily with the help of a photograph.

KEYWORDS: Chemistry; Organic Chemistry; Frying oil; Total Polar Compounds; Color Code.

■ Introduction

Frying is one of the most popular cooking processes in the world and it is defined as cooking of food items in (150-190°C) oil.¹ In this process heat and mass transmission react together. During the transmission of heat from oil through food items, water escapes and it is replaced by oil. This process causes chemical and physical reactions to take place in the oil. These reactions induce a change in viscosity, darkening of color, foaming, and a change in the oil's smoke point.

Frying oils which are exposed to high temperatures for a long time and used repeatedly form various harmful compounds for human and environmental health.^{2,3} The process causes three fundamental reactions: hydrolysis, oxidation, and thermal decay.⁴ As a result of all these reactions, a large number of volatile and non-volatile polymerization products are formed.⁵ Non-volatile polar substances contain fat-soluble and suspended substances, and they are named as Total Polar Compounds (TPC). There are more than 400 kinds of degradation products including free fatty acids, monoglycerides, diglycerides, sterols, TAG polymers, carotenoids, antioxidants, and soaps. The amount and chemical compositions of these substances depend on multiple factors such as type of nutrient and the oil, temperature, frying duration, and method of frying. However, the common feature of these degradation products is that their chemical structure is polar. Therefore, by measuring the number of polar substances in frying oil; in other words, by indicating the total polar component content (%TPC), it is feasible to make an evaluation of the total content of degradation reactions. These variables are crucial indicators for the quality and healthiness of the oil.⁶

According to multiple studies, the polar substances formed in frying oils have many negative effects on health.^{2,7,8} Impacts

of polar substances on human health vary depending on the type of the oil and polar component.⁸ Polar substances can alter carbohydrate, protein, and lipid metabolisms. Thus, they create toxicological, cytotoxic effects, and their redox potential can modulate energy metabolism. This may cause various diseases (Cancer, Coronary Artery Disease).^{8,9} According to International Food Law and Policy, frying oil gets into the status of waste oil and becomes inconvenient for cooking when the TPC content hits 25%.^{10,11} In terms of TPC amount in frying oils, governments have felt it necessary to set restrictions on them because of the potential health effects. In The European Union, the maximum (TPC) amount has been set between 24-26% by experts. This limit value is 24% in Germany; 25% in Belgium, France, Portugal, Italy, Turkey and Spain; 27% in Australia, China, Switzerland.^{2,12,13}

There are some techniques used to determine the amount of TPC in frying oils. In this context, the Official Analytical Chemists Association and the International Standards Organizations' methods are used as a reference.¹⁴⁻¹⁶ However, these techniques are time-consuming, expensive, require expertise and lab conditions, and especially require routine monitoring of commercial and industrial frying oils methods that involve sample preparation procedures that make it difficult.¹⁷ Thus, in recent years, methods and devices have been developed which are portable and detect polar substance content by using a dielectricity method or taking biosensory data as the basis. Some of the most popular rapid tests in order to evaluate frying oils utilize the changes in the permittivity of the oil which depends on the level of polar compounds in it. An ideal rapid test should be low cost, easy to use, practical, repeatable, give precise results and not require calibration. Additionally, supplemental chemical substances should not be needed, and the oils' temperature should not need to be

adjusted before taking measurements.

Nowadays, there are three different methods (Fri-check, Testo 270, and Viscofrit) of measuring TPC rapidly and directly based on physical changes in the frying oil and TPC amount.¹⁸⁻²⁰ Firstly, Fri-check measurements take the oil density, viscosity, and interface based on changes in voltage. The method is reliable and shows a correlation with the results that are gathered from reference measurements.^{18,21,22} Secondly, the Testo 270 device measurements take changes in the dielectric constant of the frying oil as a basis in its working procedure. Measurements that are taken by Testo 270 have shown good correlations in terms of frying duration and polar compound percentages. Among the fast methods that are examined, Testo 270 gives the most accurate measurement. Therefore, it can be used as the reference method. Meticulous calibration of the equipment is required. Meanwhile, it's suggested to use a calibration oil with a known source in order to set the device. Thirdly, Viscofrit measurements depend on changes of viscosity in the oil.²⁰ As long as procedures are followed correctly, this method is also reliable. However, special attention should be paid to calibration, cleaning, test temperature, oil filtering, and hygiene of the funnel.

All these tests require a certain temperature and a reference material to calculate accurately. Although they are repeatable, these tests are costly and have controversial accuracy. In this regard, there has still been a need for a faster and more cost-effective measurement system.

In chemistry, there are numerous measuring methods that are based on color, such as spectroscopy. As it is known that every matter has a color tone in nature, and these tones also have an equivalent value in a digital environment. In this digital coding system, RGB is the most known and commonly used color code system. This abbreviation stands for the three main colors. RGB; green, red, and blue. Every color tone has an equivalent numerical value. This coding system can be used for color tone-based measurements and can make subjective assessments of color tone objective. Thus, it will contribute to the accuracy and objectivity of the color-based measurement.

In this study, we aimed to develop a simple, affordable, and practical method for measuring TPC values of sunflower oil used for frying in order to make an RGB color-based analysis of the oil quality made by everybody everywhere, so that it will not require expertise.

Materials and Methods

Waste oil used in the experiments was gathered from a ministry authorized vegetable waste oil collection company, Habitat Recycling and Environment San. Tic. Ltd. Company.

Preparation of Frying Oils:

All experiments were carried out in Ege University Faculty of Medicine, Laboratory of the Department of Biochemistry. The oils with various TPC values were prepared as follows: Commercially purchased and unused oil is mixed with used waste oils in various proportions (0% - 100%) and standards are obtained. (Figure 1)

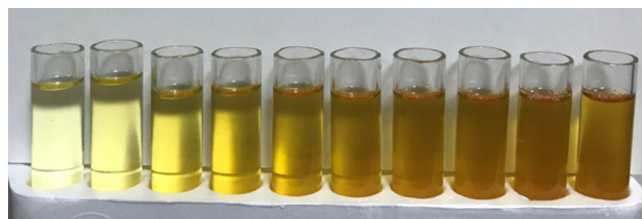


Figure 1: Outlook of samples for color analysis

Measurements Done by Testo 270:

A Testo 270 instrument was purchased for reference TPC measurements. TPC values in oil samples were measured by following the suggested application in the manufacturers' guide. Briefly, prepared oil standards were stored in 100 ml containers individually and were held in Benmari, 55°C for 30 minutes. After that, TPC measurements were carried out with the help of the Testo 270 device, and values were recorded. Each concentration measurement was repeated 5 times, and results were indicated as the average of five measurements of each concentration. (Figure 2)



Figure 2: Samples In Benmari and Testo 279

Peroxide, acidity, and density indication:

Indication of peroxide, acidity, and density levels of samples were done in an accredited laboratory in Ege University Argefar Environment and Food Analysis Laboratory.

Spectrophotometric Measurements:

Samples taken from oils were prepared, dropped, and placed in a 96-hole bowl for spectroscopic inspection. Samples were scanned spectrophotometrically by Thermo Varioskan device (Thermo Fisher Scientific, Vantaa, Finland) between 300-760 nm, and the wavelength with the maximum absorbance was indicated as 335 nm. Measurements were repeated 5 times for each sample.

Optic Measurements on Computer and Smartphone:

Examples prepared for spectrophotometric measurements were simultaneously placed in standard glass laboratory tubes and then photographs were taken with the help of a smartphone (Samsung Galaxy S9+) in order to analyze the color. (Figure 1 and 3)

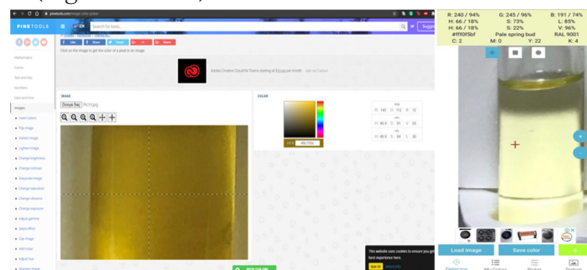


Figure 3: Color analysis applications for computer and smartphone

RGB color codes were obtained by using PineTools (Online image color picker program on computer) and Color Detector (Color picker program on smartphone). RGB color codes were obtained from ten different points. Each picture measurement was repeated 5 times, and results were indicated as the average of five measurements of each concentration.

Measurements made with Digital Image processing and machine learning techniques:


In order to conduct the color analysis of the photographs on a computer or another type of smart device, OpenCV library with the Python 3 program was used and machine learning techniques are applied. RGB values were obtained from standard 9 dots on every tube. These 9 measurement averages were taken into account for analysis. Additionally, the TPC ratios were calculated with the help of smart learning techniques regarding RGB / TPC values obtained on the computer.

Statistical Evaluation:

Statistical analyses were made in the Department of Medical Informatics and Biostatistics, Ege University, and IBM SPSS 25.0 program was used. Results that belonged to samples are given as averages and standard deviations. TPC measurements which were made with Testo 270 device utilized as the golden standard. TPC values that were calculated by spectroscopic measurement results, computer RGB color codes, smartphone RGB color codes, and the color codes calculated by the image processing technique were analyzed with the help of a compatibility test. Two-way mixed model and absolute agreement type were chosen for Reliability Analysis Statistics.

Results


TPC value of waste oil, which was utilized in the experiment, was 16%, the acid value was 0.626% mg / KOH, density was 0.914 g / ml and peroxide value was measured as 15 meq/kg. The mint state frying oil, which was bought from the market, TPC value was measured as 9.5%, acid value 0.169% mg / KOH, density 0.912 g / ml, and peroxide value was determined to be 12 meq/kg. When the waste oil was diluted with the mint state oil, it was clearly observable that acidity decreased. As the acidity value increases, the RGB color code changes. Oil's acidity was predicted by RGB color code as 96%. (Graph 1)

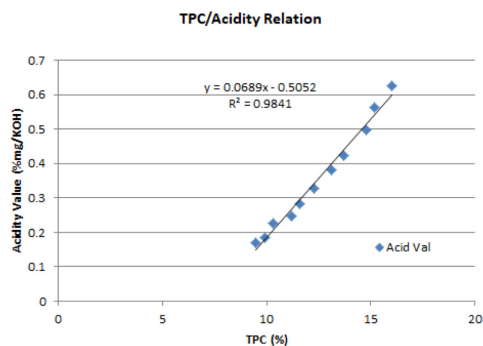


Graph 1: TPC/Acidity Relation

It was shown that TPC values that are measured with Testo 270 and values measured by spectrophotometer have a high correlation (Graph 2). Our results show that RGB color codes have a high correlation with TPC values. TPC values which

are measured by Color codes of oils on images gathered from both the computer (Graph 3) and cell phones (Graph 4) are found compatible with TPC reference values which were measured by Testo 270 device.

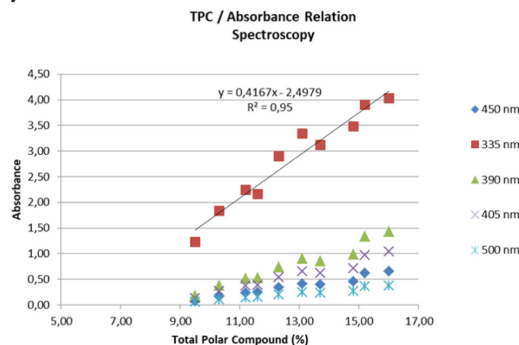


Graph 2: Scatter plot belong to TPC and different absorbance values

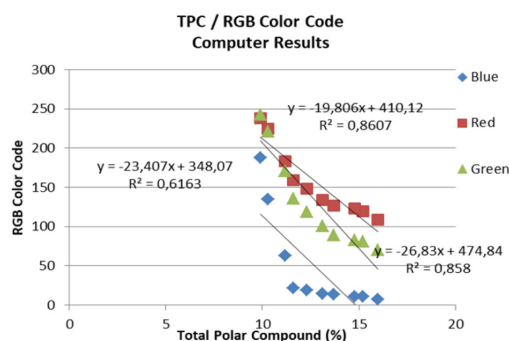

Graph 3: RGB color code measured with the help of a Computer and TPM relationship scatter plot.

Best results were obtained from the R/G ratio. Both computer and cell phone measurements were compatible with measurements gathered from machine learning techniques.

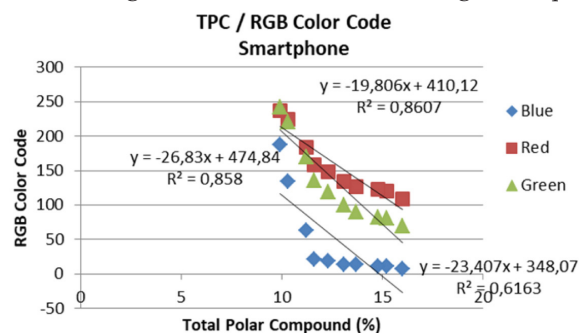

Graph 4: RGB color code was measured with the help of a smartphone and TPM relationship scatter plot.

According to the results of the reliability statistics, the nearest measurements to our gold standard, which is made with the Testo 270 device, were the results of the R/G ratio. Computer, smartphone, and machine learning calculations of R/G proportion have shown great correspondence to each other (Table 1).

Discussion

In this study, a new method of measuring TPC values of frying oils based on RGB color codes was developed. Since there

is no study done with RGB in the literature, our study brings innovation to oil measurement methods as a practical method based on RGB code. Additionally, it is shown in our study that the TPC value can be extrapolated from a picture that has been taken by a smartphone with the help of machine learning techniques. The operability of our method is tested with the help of basic software.

Table 1: TPC results obtained from different methods and correlation with Testo 270.

	Testo 270	Spectroscopy	Computer	Smartphone	Machine Learning
100%	16,00	15,59	15,63	15,71	15,61
90%	15,20	15,31	14,84	15,45	14,74
80%	14,80	14,34	14,95	14,44	15,10
70%	13,70	13,53	14,32	14,33	14,49
60%	13,10	14,03	13,38	13,30	13,40
50%	12,30	13,02	12,52	12,47	12,62
40%	11,60	11,33	11,72	11,16	11,55
30%	11,20	11,53	10,78	10,80	10,69
20%	10,30	10,60	10,14	10,23	10,05
10%	9,90	9,14	9,80	10,19	9,84
mean	12,81	12,841	12,809	12,808	12,809
variance	4,42	4,49	4,53	4,55	4,72
correlation with Testo270		0,967	0,987	0,985	0,981

Generally, in frying oil TPC measuring methods, it is required to heat the oil, to calibrate the tool with reference oil at regular intervals, to use some chemical substances for color comparison, or to reference a color catalog before analysis.²² None of these are practical. As stated in our study, it is feasible to calculate the TPC value of a particular frying oil with the help of only one picture taken by a smartphone. The mechanism is easy, practical, repeatable, and affordable. In this regard, the main question of our study has been answered. Our method is tested with the TPC measuring device that has already been used and spectrophotometric measurement methods.

According to the results of the compliance statistics, the nearest measurements to our gold standard, which is made with the Testo 270 device, were the results of the R/G proportion. PC, smartphone, and machine learning calculations of R/G proportion have shown great relevance to each other.

There aren't adequate studies regarding the usage of image analysis to define the oil quality. RGB color codes can be used in defining the type of vegetable oils.^{23,24} Their cooking quality can also be evaluated in another study by making a color analysis of images of the food items after they are cooked.²⁵ In another study, it may be possible to indicate the rottenness of the oil using image processing techniques, artificial neural networks, and evaluating RGB values.²⁶ Besides our main focus, one of the major indicators of the oil quality is acidity value, and it is also feasible to calculate that using RGB color codes.

In our study, we have demonstrated that TPC values in frying oils can be measured by image processing. More recently in another study, it is shown that nucleic acid assay can be measured via RGB color code analysis with the help of a smartphone application.²⁷ This contributes to the reliability of our study.

We determined that the TPM value of the waste frying oil we procured from the waste oil collection center is 16%. This shows that while trying to be extremely sensitive about health, unnecessary disposal of waste frying oil is happening. Hence, this dilemma has a negative impact on both the country's

economy and the environment. Thanks to the method we have found, the amount of TPC can be determined with a photo anywhere. Thus, the preservation of the environment won't be forgotten while providing an economic profit.

■ Conclusion

It will be feasible to directly determine when the oil will be useless and harmful with this quick, easy, affordable, repeatable method. Before frying oils reach a state that is harmful to human health, restriction of their usage at the right time will be easily decided by applying this method. Through this technique, the TPC content of the oil can be measured easily with the help of a photograph. Furthermore the harmful effects of oil on human health will be prevented. Additionally, it will contribute to the renewal of the environment and state economy.

■ Acknowledgements

During this project, thanks a lot to Erhan Canbay and Zihni Onur Uygun from Ege University Faculty of Medicine, Department of Medical Biochemistry for providing their laboratory in order to put my experiments into practice; thanks to Emre Sarı from Izmir Institute of Technology, Faculty of Science, Department of Photonics and to my advisor Oktay Ünal.

■ References

- Choe, E.; Min, D. B. Chemistry of Deep-Fat Frying Oils. *Journal of Food Science* 2007, 72 (5).
- Hosseini, H.; Ghorbani, M.; Meshginfar, N.; Mahoonak, A. S. A Review on Frying: Procedure, Fat, Deterioration Progress and Health Hazards. *Journal of the American Oil Chemists' Society* 2016, 93 (4), 445–466.
- Rakıcıoğlu, N.; Baysal, A. Yağda Kızartma yöntemi ile Pişirmede Oluşan Fiziksel ve Kimyasal Değişiklikler ve bunların insan sağlığı üzerine Etkisi. <https://beslenmevediyetdergisi.org/index.php/bdd/article/view/777> (accessed Jan 30, 2022).
- Sumnu, S.G., & Sahin, S. *Advances in Deep-Fat Frying of Foods*. CRS Press 2008.
- Depren, E, Seven, Ü., Güçer, Ş. (2008). Isıl İşlem Sırasında Zeytinyağında Meydana Gelen Fiziksel Ve Kimyasal Değişimler Paper presented at the I.Ulusal Zeytin Öğrenci Kongresi, EdremitBalıkesir.
- <https://lipidlibrary.aocs.org/chemistry/physics/frying-oils/determination-of-polar-compounds-in-used-frying-oils-and-fats-by-adsorption-chromatography>(accessed Jan 30, 2022).
- Innawong, B.; Mallikarjunan, P.; Marcy, J. E. The Determination of Frying Oil Quality Using a Chemosensory System. *LWT - Food Science and Technology* 2004, 37 (1), 35–41.
- Yuan, L.; Jiang, F.; Cao, X.; Liu, Y.; Xu, Y.-J. Metabolomics Reveals the Toxicological Effects of Polar Compounds from Frying Palm Oil. *Food & Function* 2020, 11 (2), 1611–1623.
- Li, J.; Li, X.; Cai, W.; Liu, Y. Comparison of Different Polar Compounds-Induced Cytotoxicity in Human Hepatocellular Carcinoma HepG2 Cells. *Lipids in Health and Disease* 2016, 15 (1).
- Dobargarnes, M. C.; Márquez-Ruiz, G. *Grasas y Aceites* 1998, 49 (3–4), 331–335.
- Paul, S.; Mittal, G. S.; Chinnan, M. S. Regulating the Use of Degraded Oil/Fat in Deep-Fat/Oil Food Frying. *Critical Reviews in Food Science and Nutrition* 1997, 37 (7), 635– 662

12. Ben Hammouda, I.; Triki, M.; Matthäus, B.; Bouaziz, M. A Comparative Study on Formation of Polar Components, Fatty Acids and Sterols during Frying of Refined Olive Pomace Oil Pure and Its Blend Coconut Oil. *Journal of Agricultural and Food Chemistry* 2018, 66 (13), 3514–3523.
13. Firestone, D. Regulation of Frying Fat and Oil. *Deep Frying* 2007, 373–385.
14. AOAC. (2002). Official Method 982.27. Polar components in frying fats, Chapter 41.41. 34.
15. AOCS, (2020). Determination of Polar Compounds in Used Frying Oils and Fats by Adsorption Chromatography. Retrieved from <https://lipidlibrary.aocs.org/chemistry/physics/fryingoils/determination-of-polarcompounds-in-used-frying-oils-and-fats-by-adsorptionc>
16. AUN, J. A. M. E. S. K.; CANTRILL, R. I. C. H. A. R. D. Process for Development of Standard Methods for the Analysis of Fats, Oils and Lipids. *Advances in Lipid Methodology* 2012, 273–299.
17. Correia, A. C.; Dubreucq, E.; Ferreira-Dias, S.; Lecomte, J. Rapid Quantification of Polar Compounds in Thermo-Oxidized Oils by Hptlc-Densitometry. *European Journal of Lipid Science and Technology* 2014, 117 (3), 311–319.
18. Frai. (20 October 2009). Fri-check. [WWW page]. URL. <http://www.frais.com.br/>.
19. Ana Sayfa. <https://www.testo.com/tr-TR/services/video-trainings-testo-270> (accessed Jan 30, 2022).
20. <https://host.io/viscofrit.com> (accessed Jan 30, 2022).
21. Gertz, C. Chemical and Physical Parameters as Quality Indicators of Used Frying Fats. *European Journal of Lipid Science and Technology* 2000, 102 (8-9), 566–572.
22. Osawa, C. C., Gonçalves, L. A. G., & Grimaldi, R. (2005). Nova ferramenta destinada ao monitoramento e à inspeção do descarte “in situ” de óleos e gorduras de fritura. *Revista Brasileira de Vigilância Sanitária*, 1(2), 102e107.
23. Fengxia, S.; Dishun, Z.; Zhanming, Z. Determination of Oil Color by Image Analysis. *Journal of the American Oil Chemists' Society* 2001, 78 (7), 749–752.
24. Milanez, K. D.; Pontes, M. J. Classification of Edible Vegetable Oil Using Digital Image and Pattern Recognition Techniques. *Microchemical Journal* 2014, 113, 10–16.
25. Sabbaghi; Hassan; Ziaififar; Mohammad, A. [pdf] color quality variation of french fries during frying using image processing: Semantic scholar. <https://www.semanticscholar.org/paper/Color-quality-variation-of-french-fries-during-Sabbaghi-Hassan/e755a91488fada431b010e11772b18aa5a95215d> (accessed Jan 30, 2022).
26. (pdf) quality identification of used cooking oil based on https://www.researchgate.net/publication/303840408_Quality_Identification_of_Used_Cooking_Oil_Based_on_Feature_Fusion_of_Gas_Sensor_and_Color (accessed Jan 30, 2022).
27. Aydın, H. B.; Cheema, J. A.; Ammanath, G.; Toklucu, C.; Yucel, M.; Özenler, S.; Palaniappan, A.; Liedberg, B.; Yildiz, U. H. Pixelated Colorimetric Nucleic Acid Assay. *Talanta* 2020, 209, 120581.

■ Authors

Boran Duman is a 16-years-old high school student who is interested in multiple branches of science and technology. He is excited to participate in environmental scientific research. His ambition for developing and inventing practical inventions and research methods directed him to this project.